


❖ CX24型外型尺寸:

● 非屏蔽电缆式(CX24ZL-F)



● 非屏蔽仪器式(CX24Z-F)

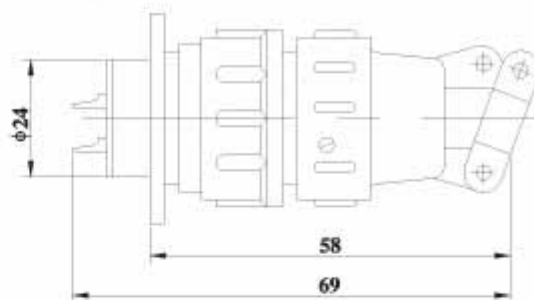

● 安装尺寸



芯 数	12芯	19芯	26芯
排 列 图			
额定电流A	5	3	3
接触对直径、数量	φ2.5*12	φ1.5*12	φ1.5*12
工作电压 (AC.V,rms)	500	500	500
耐压 (AC.V) 1min	1500	1500	1500
接触电阻mΩ	<5mΩ	<5mΩ	<5mΩ
绝缘电阻MΩ	>500MΩ	>500MΩ	>500MΩ

● 屏蔽电缆式(CX24ZL-K)



● 屏蔽仪器式(CX24Z-K)

