



AMS3108B

SOCKET

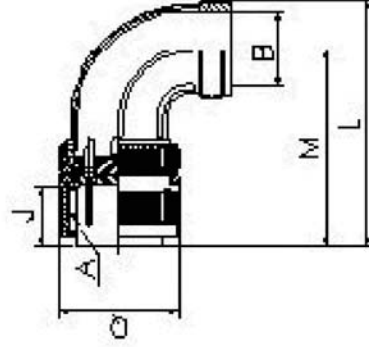

PIN PLUG



SOCKET

PIN

Shell Size(ps.2)	Coupling Threads A	Cable B=0.3	Length of connector ±0.3	Full length	M±0.8	Outer radius Q ±0.3	U ±0.8	Rear Threads V	Length of thread over W
12C	3/4 20UNC F 2D	9.6	±0.5	50.0	41.7	25.4	25.4	5/0 24UNC F 2A	9.5
14S	7/8-20UNEF-2B	12.5	±0.5	54.0	43.3	28.6	27.0	3/4-20UNEF-2A	9.5
16S	1-20UNEF-2B	15.6	±0.5	60.3	48.0	31.8	28.6	7/8-20UNEF-2A	9.5
16	1 20UNC F 2D	15.6	±0.0	65.1	52.0	31.0	20.6	7/0 20UNC F 2A	9.5
18	:-1/8-18UNEF-2B	13.6	±0.3	68.3	54.4	34.1	32.1	1-20UNEF-2A	9.5
20	:-1/4-18UNEF-2B	23.0	±0.3	77.0	60.7	37.3	33.7	1-3/16-18UNEF-2A	9.5
22	:-3/8-18UNEF-2B	23.2	±0.3	77.0	60.7	40.5	33.3	1-3/16-18UNEF-2A	9.5
24	:-1/2-18UNEF-2B	29.6/28.0	±0.3	86.5	67.1	43.7	34.9	1-7/16-18UNEF-2A	9.5
28	1-3/4-18UNS-2B	29.8/28.2	±0.3	86.5	67.1	50.0	38.5	1-7/16-18UNEF-2A	9.5
32	2-18UNS-2B	35.9	±0.3	95.2	71.8	56.4	46.4	:-3/4-18UNEF-2A	11.1
36	2-1/4-16UN-2B	42.73/42.2	±0.3	100.C	73.4	62.7	51.2	2-18UNS-2A	12.7
48	3-16UN-2B	69.1/61.9	±0.3	125.4	86.5	81.8	59.1	3-16UN-2A	15.9