



**大豪电子**  
电话:0775-83233025  
<http://www.szdahao.com>  
<http://www.very-tec.com>

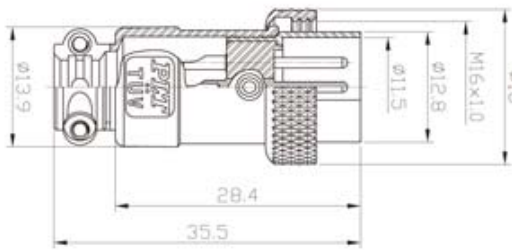

PLT-16 ◆-PM

**大豪电子**  
电话:0775-83233025  
<http://www.szdahao.com>  
<http://www.very-tec.com>



PLT-16 ◆-RF



◆ No. of contacts	2	3	4	5	6	7	8	9	10
Contacts Configuration									
Rated current / voltage	5A 125V	5A 125V	5A 125V	5A 125V	5A 125V	5A 125V	5A 125V	1A 125V	1A 125V
Operation limit voltage (AC.V.rms)	200	200	200	200	200	200	200	200	200
Withstanding voltage (AC.V.rms) 1 minute	1000	1000	1000	1000	1000	1000	1000	1000	1000
Insulation resistance (MΩ MIN.) at DC 500V	1000	1000	1000	1000	1000	1000	1000	1000	1000
Contact resistance (MΩ MAX.) at DC 1A	15	15	15	20	20	20	20	20	20
Solder inter diameter	1.4	1.4	1.4	1.2	0.8	0.8	0.8	0.8	0.8