







Spec. Model	Rated Voltage V	Frequency	Input Power W	Rated Current A	Locked Current A	Speed	Maximum Air Flow m³/min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise dB	Weight
UF9439CBP12H-L 120		50	43	0.40	0.60	1400	7.5	265	3.5	0.14	48	3.5
	320	60	50	0.40	0.60	1600	9.0	318	4.5	0.18	53	3,5
UF9439CBP23H-L 230	220	50	43	0.20	0.31	1400	7.5	265	3.5	0.14	48	2.5
	230	60	50	0.22	0.31	1600	9.0	318	4.5	0.18	53	3,5



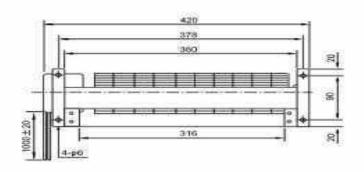









Spec. Model	Rated Voltage V	Frequency	Input Power W	Rated Current A	Locked Current A	Speed	Maximum Air Flow m³/min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchHiO	Noise dB	Weight
UF9029CBP12H-L 120	120	50	33	0.28	0.40	1350	4.5	159	2.2	0.09	43	3,0
	720	60	31	0.27	0.40	1560	5.0	177	3.3	0.13	46	
UF9029CBP23H-L 230	230	50	33	0.14	0.20	1350	4.5	159	2.2	0.09	43	3.0
		60	31	0.13	0.19	1560	5.0	177	3.3	0.13	46	



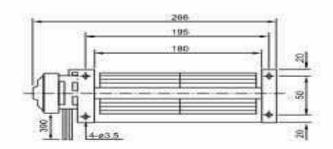








Spec. Model	Rated Voltage V	Frequency	Input Power W	Rated Current A	Locked Current A	Speed	Maximum Air Flow m³/min.	Maximum Air Flow CFM	Maximum Pressure mmH ₂ O	Maximum Pressure InchH ₂ O	Noise	Weight
UF6017SSA12H-L 120	120	50	27	0.45	0.52	2200	3.0	106	6.0	0.24	43	1.3
	120	Tak Go		0.40	0.42	2000	2.5	89	5.5	0.22	42	1,3
UF6017SSA23H-L	230	50	27	0.22	0.26	2200	3.0	106	6.0	0.24	43	1.3
UF BOTT BOAZSITE	POOT PSAZSIFE 230	60	25	0.20	0.22	2000	2.5	89	5.5	0.22	42	110



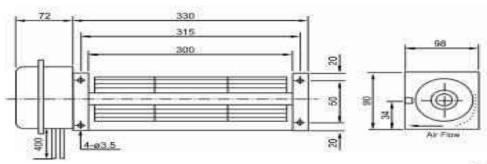









Spec.	Rated Voltage	Frequency	Input	Rated Current	Locked	Speed	Maximum Air Flow	Maximum Air Flow	Maximum Pressure	Maximum Pressure	Noise.	Weight
Model	V	Hz	W	А	Α	RPM	m³/min.	CFM	mmH2O	InchH ₂ O	dB	kg
UF6030CBA12H-L 120	120	50	35	0.33	0.46	2600	5.0	177	5.0	0.20	50	2.0
AT THE SECTION OF THE		60	37	0.33	0.46	3000	5.5	195	7.5	0.30	53	2.0
JF6030CBA23H-L 230	50	35	0.17	0.22	2600	5.0	177	5.0	0.20	50	2.0	
S. COUGGERIES I'L	200	60	37	0.17	0.22	3000	5.5	195	7.5	0.30	53	2.0



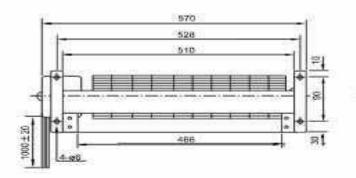








Spec. Model	Rated Voltage V	Frequency	Input Power W	Rated Current A	Locked Current A	Speed	Maximum Air Flow m³/min.	Maximum Air Flow CFM	Maximum Pressure mmHaO	Maximum Pressure InchHiO	Noise d8	Weight
UF9446CBP12H-L 120	120	50	43	0.40	0.63	1350	B.5	300	3.5	0.14	48	3.6
37 33 133301 12112	14.50	60	50	0.42	0.63	1550	10.0	354	5.0	0.20	53	3.6
UF9446CBP23H-L 230	230	50	43	0.20	0.31	1350	8.5	300	3.5	0.14	48	3.6
		60	50	0.23	0.31	1550	10.0	354	5.0	0.20	53	3.6



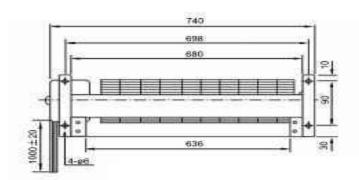









Spec.	Rated Voltage	Frequency	Input Power	Rated Current	Locked Current	Speed	Maximum Air Flow	Maximum Air Flow	Maximum Pressure	Maximum Pressure	Noise	Weight
Model	V	HZ	W.	A	A	RPM	m³/min.	CFM	mmH ₂ O	InchH2O	dB.	kg
UF9060CBP12H-L 12	120	50	130	1.00	1.40	2150	15.5	550	9	0.35	55	5.3
	10000	60	160	1.25	1.40	2100	15.0	530	11	0.43	54	5.3
UF9060CBP23H-L	230	50	130	0.55	0.75	2150	15.5	550	9	0.35	55	5.3
		60	160	0.70	0.75	2100	15.0	530	11	0.43	54	5.3